



Approval



TO :

DATE : Mar. 12 , 2012

SAMSUNG TFT-LCD**MODEL NO. : LTN133AT23-0**

NOTE : Extension code [- 0**]

→ LTN133AT23-0**

Surface type [**Anti-Glare**]Any modification of Spec is not allowed without SEC's permission

APPROVED BY :

PREPARED BY :

Khan Kim**Application Engineer Group****SAMSUNG ELECTRONICS CO., LTD.****Samsung Secret**



Approval

CONTENTS

Revision History	----- (3)
General Description	----- (4)
1. Absolute Maximum Ratings	----- (5)
1.1 Absolute Ratings of environment	
1.2 Electrical Absolute Ratings	
2. Optical Characteristics	----- (7)
3. Electrical Characteristics	----- (10)
3.1 TFT LCD Module	
3.2 Backlight Unit	
3.3 LED Driver	
4. Block Diagram	----- (13)
4.1 TFT LCD Module	
4.2 LED Placement Structure	
5. Input Terminal Pin Assignment	----- (14)
5.1 Input Signal & Power	
5.2 LVDS Interface	
5.3 Timing Diagrams of LVDS For Transmitting	
5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color	
5.5 Pixel format	
6. Interface Timing	----- (21)
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	----- (23)
8. Packing	----- (25)
9. Markings & Others	----- (26)
10. General Precautions	----- (28)

Samsung Secret

Date	Revision No.	Page	Summary
Mar. 12, 2012	A00	All	The Approval specification of LTN133AT23-0 was issued first.

Samsung Secret

GENERAL DESCRIPTION

DESCRIPTION

LTN133AT23 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices.

This model is composed of a TFT LCD panel, a driver circuit and a backlight unit.

The resolution of a 13.3" contains 1366 x 768 pixels and can display up to 262,144 colors.

6 O'clock direction is the optimum viewing angle.

FEATURES

- High contrast ratio
- HD(1366 x 768 pixels) resolution
- Fast Response
- LED Back Light with embedded LED Driver
- DE (Data enable) only mode
- 3.3V LVDS Interface
- Onboard EEDID chip

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	293.4168 (H) x 164.9664 (V) (13.3"diagonal)	mm	
Driver element	a-Si TFT active matrix		
Display colors	262,144		
Number of pixel	1366 * 768	pixel	
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.2148(H) x 0.2148(V)	mm	
Display Mode	Normally white		
Surface treatment	Haze 25%		Anti Glare

Samsung Secret

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	307.5	308.0	308.5	mm	
	Vertical (V)	183.0	183.5	184.0	mm	
	Depth (D)	-	-	4.0	mm	With PCB area
Weight		-	310	325	g	


Note (1) Measurement condition of outline dimension
 . Equipment : Bernier Calipers
 . Push Force : 750 ± 250 g · f

1. ABSOLUTE MAXIMUM RATINGS

1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock (non-operating)	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.
 95 % RH Max. (40 °C > Ta)
 Maximum wet - bulb temperature at 39 °C or less. (Ta ≥ 40 °C) No condensation

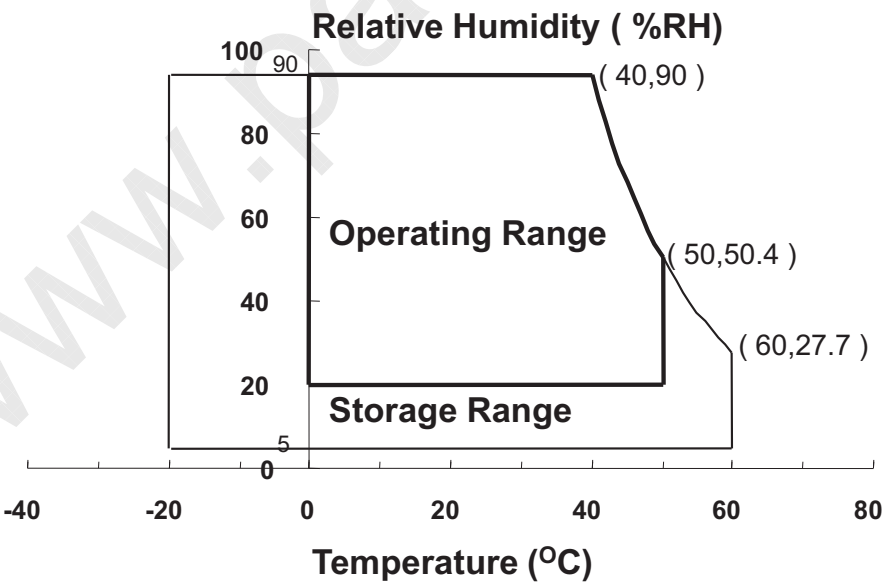

- (2) 2ms, half sine wave, one time for ±X, ±Y, ±Z.
- (3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.
- (4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Samsung Secret

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

V_{DD} =3.3V, V_{SS} = GND = 0V

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V _{DD}	V _{DD} - 0.3	V _{DD} + 0.3	V	(1)
Logic Input Voltage	V _{IN}	V _{DD} - 0.3	V _{DD} + 0.3	V	(1)

Note (1) Within Ta (25 ± 2 °C)

(2) BACK-LIGHT UNIT

Ta = 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Current	I _L	-	24	-	mArms	(1)
LED Voltage	V _L	-	3.2	-	V	(1)

Note 1) Permanent damage to the device may occur if maximum values are exceeded
Functional operation should be restricted to the conditions described under normal operating conditions.

Samsung Secret

2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).
Measuring equipment : TOPCON SR-3


* Ta = 25 ± 2 °C, V_{DD}=3.3V, fv= 60Hz, f_{DCLK} = 70.7MHz, IF = 100% duty

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR	Normal Viewing Angle $\phi = 0$ $\theta = 0$	300	-	-	-	(1), (2), (5)
Response Time at Ta (Rising + Falling)		T _{RT}		-	16	25	msec	(1), (3)
Average Luminance of White (5 Points)		Y _{L,AVE}		200	220	-	cd/m ²	IF=100% duty (1), (4)
Color Chromaticity (CIE)	Red	R _X		Typ- 0.03	0.560	Typ +0.03	-	(1), (5) SR-3
		R _Y			0.340			
	Green	G _X			0.335			
		G _Y			0.565			
	Blue	B _X			0.160			
		B _Y			0.120			
	White	W _X			0.313			
		W _Y	0.329					
Viewing Angle	Hor.	θ_L	CR $\geq$ 10 At center	30	45	-	Degrees	
		θ_H		30	45	-		
	Ver.	ϕ_H		10	15	-		
		ϕ_L		20	30	-		
Color Gamut		CG		-	45	-	%	
13 Points White Variation		δ_L		-	1.7	2.0	-	(6)

Samsung Secret

Approval

Note 1) Definition of Viewing Angle : Viewing angle range($10 \leq C/R$)

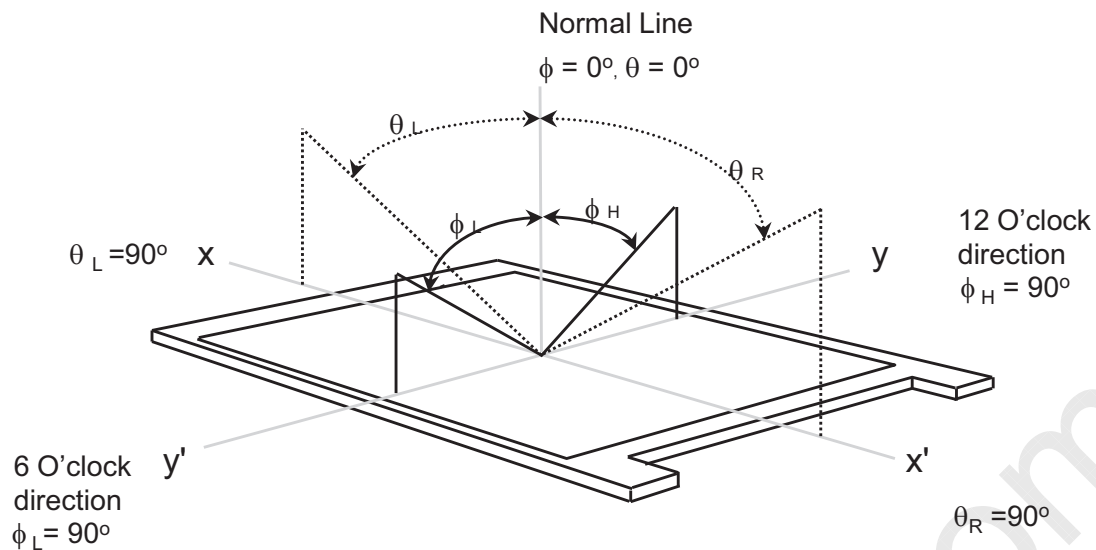


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points(4, 5, 7, 9, 10)

$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : ④ , ⑤ , ⑦ , ⑨ , ⑩ at the figure of Note (6).


Note 3) Definition of Response time :

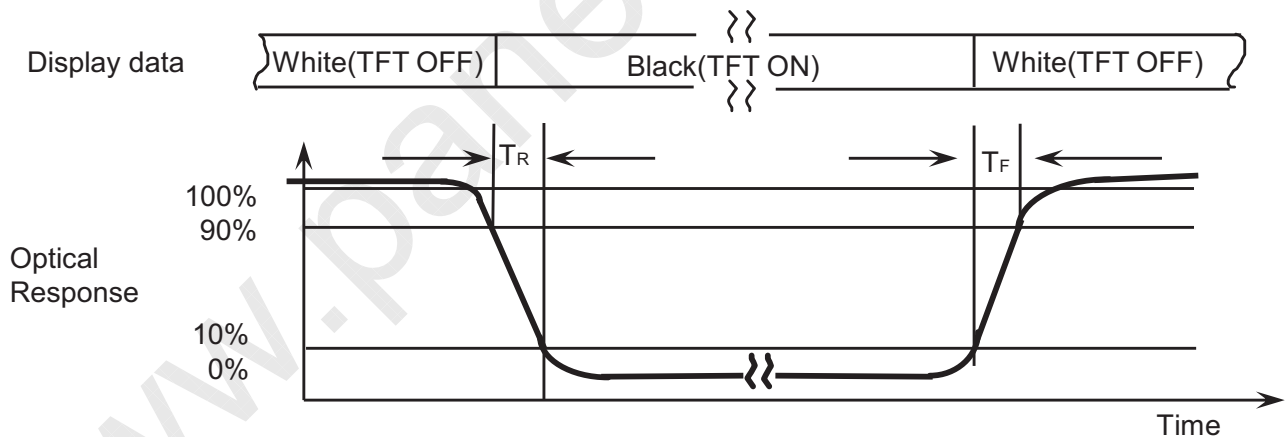

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.


Average Luminance of White ($Y_{L,AVE}$)

$$Y_{L,AVE} = \frac{Y_{L4} + Y_{L5} + Y_{L7} + Y_{L9} + Y_{L10}}{5}$$

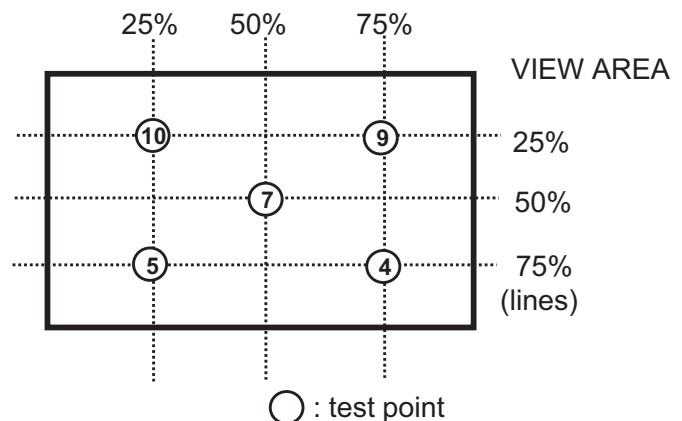


Samsung Secret

Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless,and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.
IF current : 24mA
Environment condition : Ta = 25 ± 2 °C

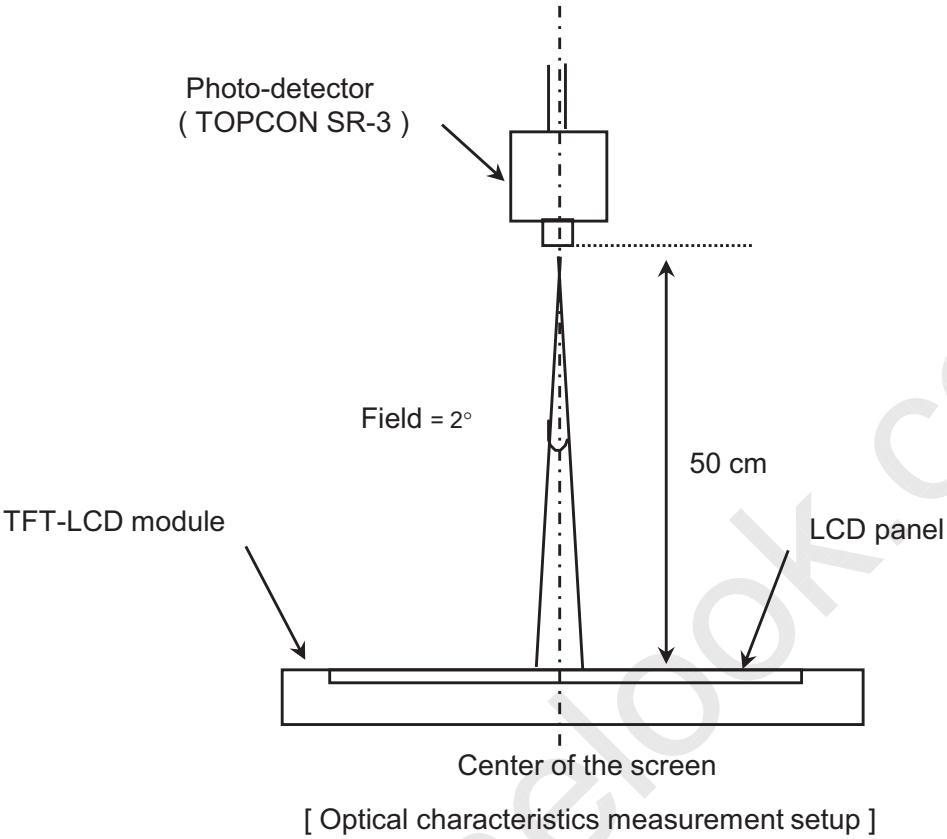

Note 6) Definition of 13 points white variation (δL), CR variation(C_{VER}) [① ~ ⑬]

$$\delta L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

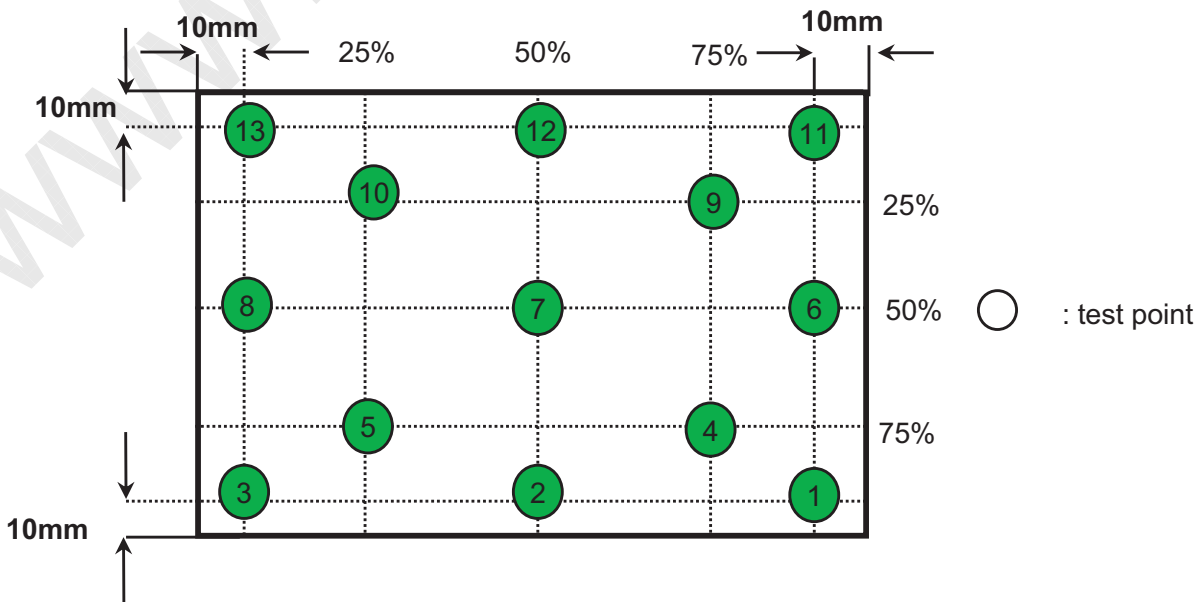

Samsung Secret

3. ELECTRICAL CHARACTERISTICS

Approval

3.1 TFT LCD MODULE

Ta= 25 ± 2°C


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V _{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold	High	V _{IH}	-	-	+100	mV	V _{CM} = +1.2V
	Low	V _{IL}	-100	-	-	mV	
Vsync Frequency		f _v	-	60	-	Hz	
Main Frequency		f _{DCLK}	-	70.7	-	MHz	-
Rush Current		I _{RUSH}	-	-	1.5	A	(4)
Current of Power Supply	White	IDD	-	230	-	mA	*a),b),c)
	Mosaic		-	210	254	mA	
	V.stripe		-	300	-	mA	

Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)
(2) f_v = 60Hz, f_{DCLK} = 70.7MHZ, V_{DD} = 3.3V , DC Current.
(3) Power dissipation pattern

*a) White Pattern




*b) Mosaic Pattern

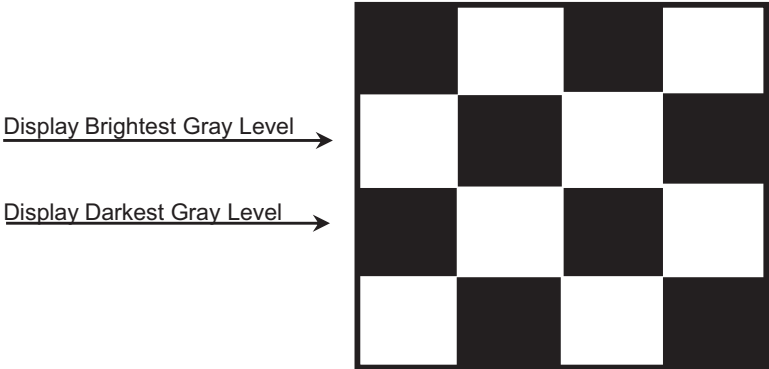


Samsung Secret

Approval


*c) 1dot Vertical stripe pattern

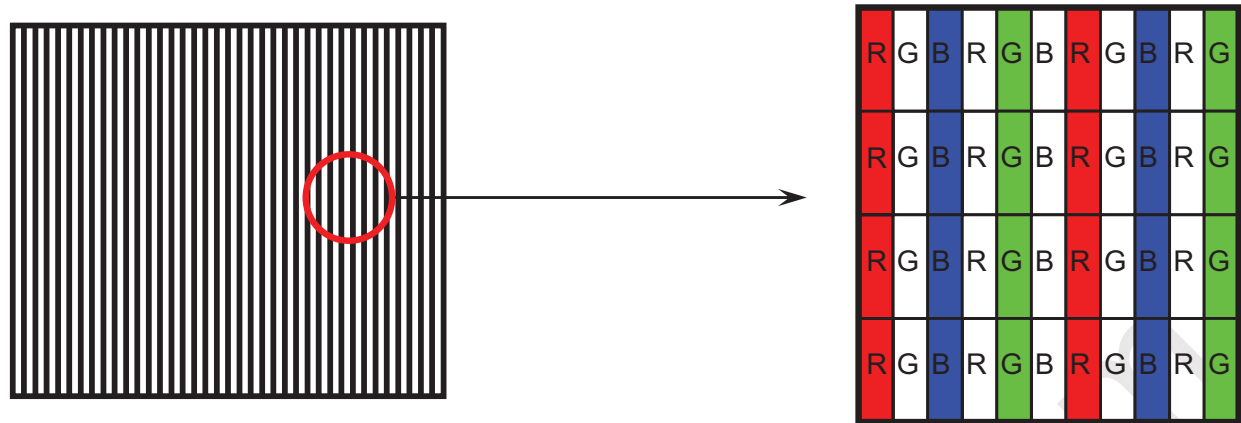

4) Rush current measurement condition

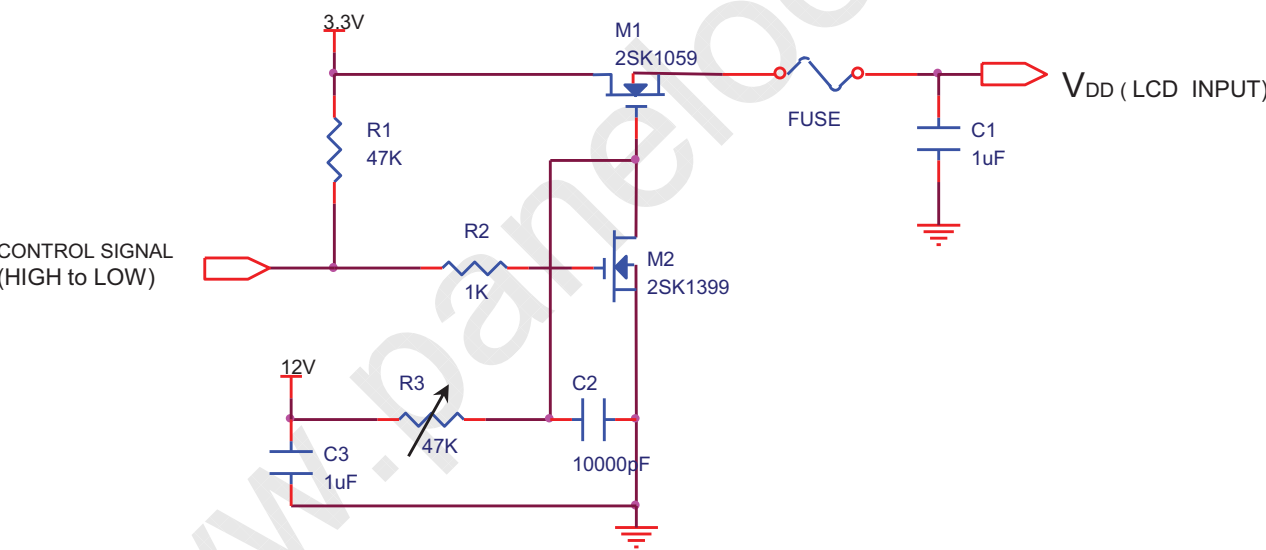

V_{DD} rising time is 470us

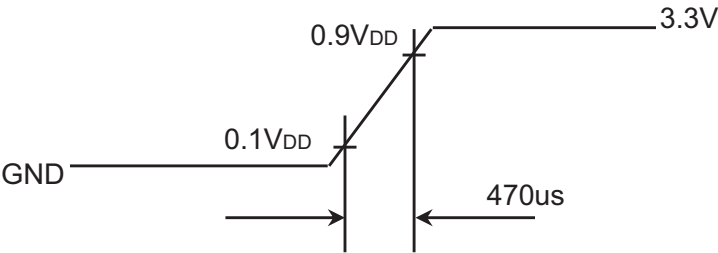

Samsung Secret

Approval

3.2 BACK-LIGHT UNIT

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Forward Current	IF	-	24	-	mA	
LED Forward Voltage	VF	-	3.2	-	V	
LED Array Voltage	VP	-	25.6	-	V	VF X 8LEDs
BL consumption	P	-	-	0.8	W	@ 60 nit
		-	3.4	3.8	W	@ Max

Note (1) Life time (Hr) of LEDs can be defined as the time in which it continues to operate under the condition Ta= 25 ± 2 °C and IF = 24mA until one of the following event occurs.
When the brightness becomes 50% or lower than the original.

3.3 LED Driver

- On board LED Driver (RICHTEK)

Ta= 25 ± 2 °C


Item-	Symbol	Min.	Typ.	Max.	Unit	Note
Input Voltage	V _{in}	7	12	24	V	-
Input Current	I	-	280	316	mA	-
EN control level	ON	2	3.3	5.0	V	
	OFF	0	0	0.5	V	
PWM control level	ON	2	3.3	5.0	V	
	OFF	0	0	0.5	V	
PWM Control Duty Ratio	D	5	-	100	%	
External PWM Dimming Control Frequency (BLIM)	F _{BLIM}	0.12	1	30	kHz	
Operating Life Time	Hr	15,000	-	-	Hour	

Note - Test Equipment : Fluke 45


Samsung Secret

4. BLOCK DIAGRAM

4.1 TFT LCD Module

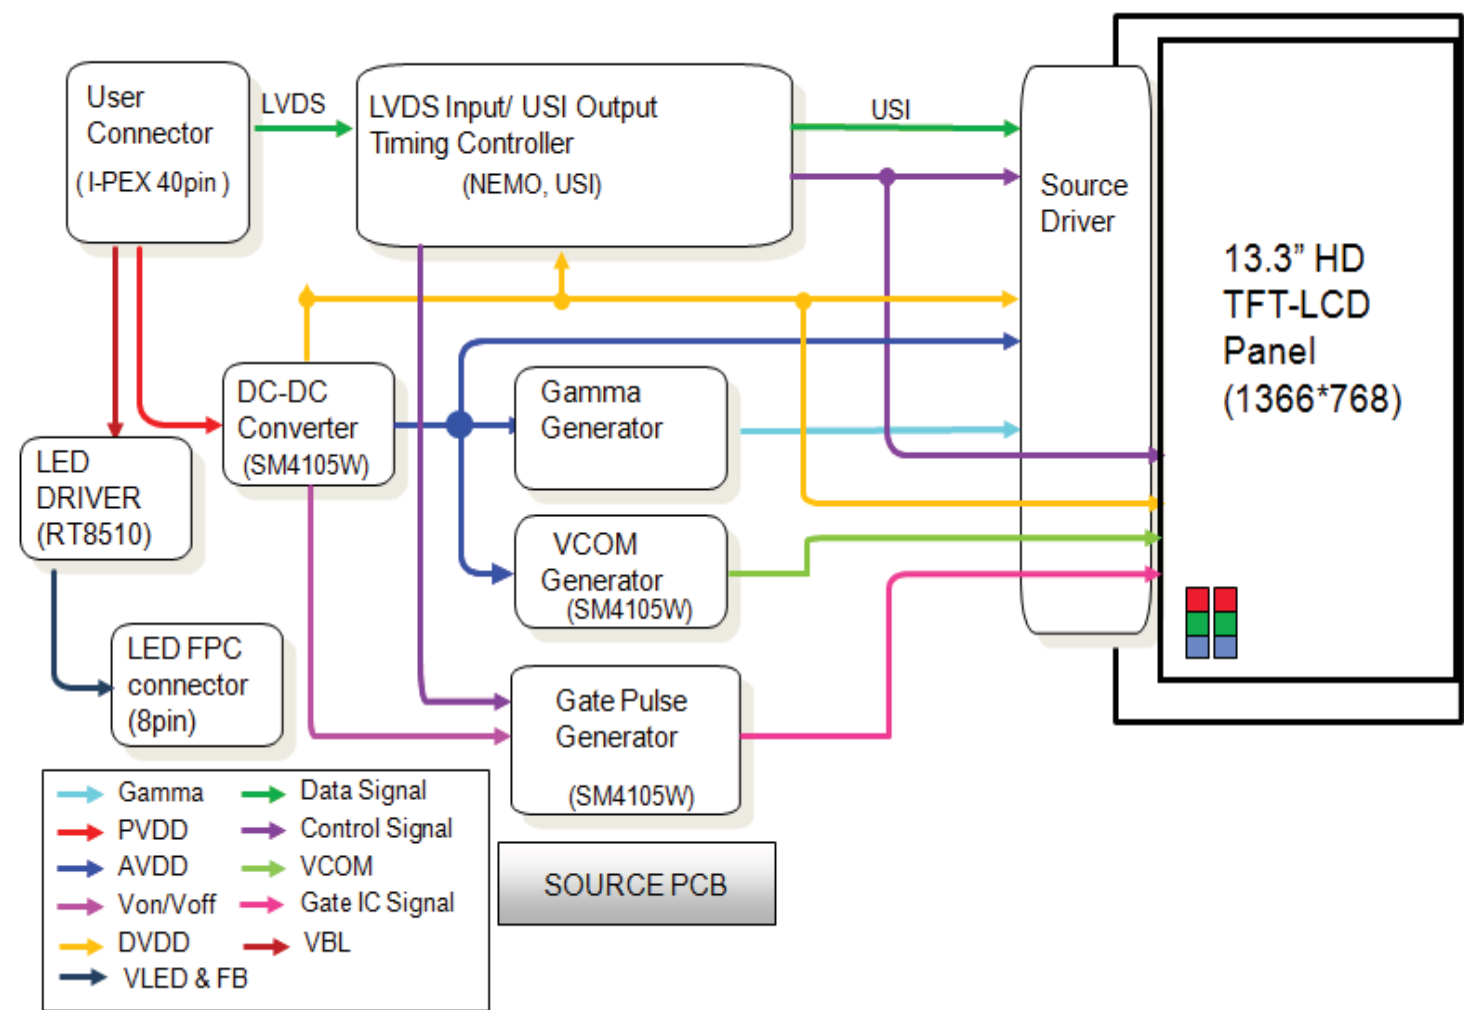

4.2 LED placement structure

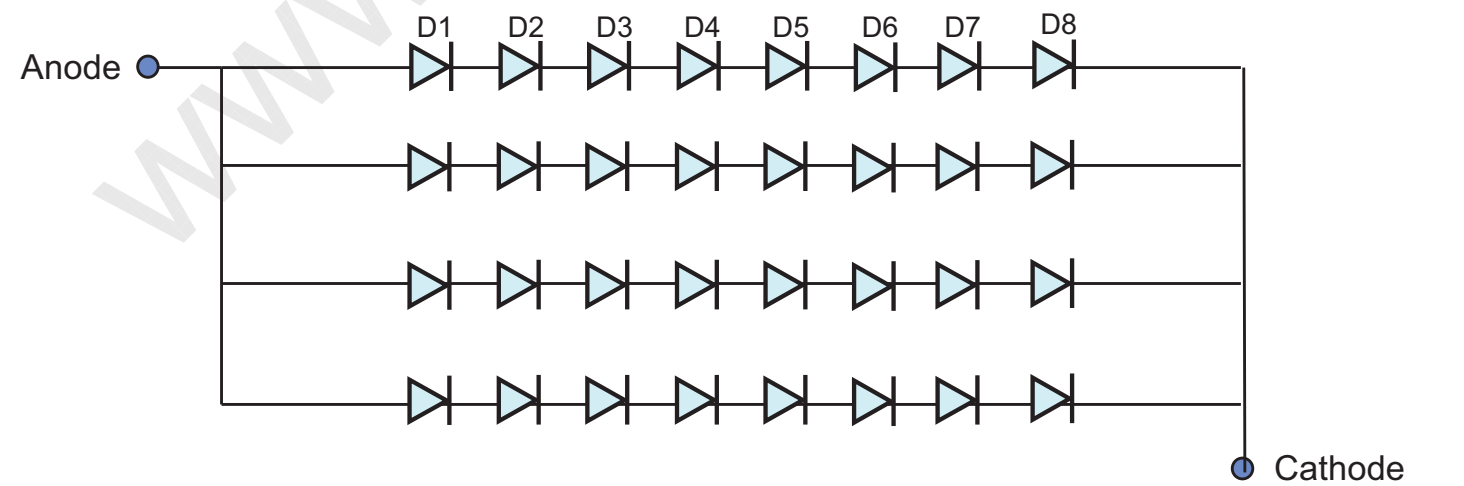

Samsung Secret



5. INPUT TERMINAL PIN ASSIGNMENT

Approval

5.1. Input Signal & Power (LVDS, Connector : I-PEX 20455-040E-## or equivalent)

No.	Symbol	Function	Polarity	Remarks
1	NC	No Connection (Reserved for supplier)		
2	AVDD	Power Supply 3.3V (typical)		
3	AVDD	Power Supply 3.3V (typical)		
4	DVDD	DDC 3.3V power		
5	NC	No Connection (Reserved for supplier)		
6	SCL	DDC Clock		
7	SDA	DDC data		
8	RIN0-	-LVDS differential data input (R0-R5, G0)	Negative	
9	RIN0+	+LVDS differential data input (R0-R5, G0)	Positive	
10	GND	Ground		
11	RIN1-	-LVDS differential data input (G1-G5, B0-B1)	Negative	
12	RIN1+	+LVDS differential data input (G1-G5, B0-B1)	Positive	
13	GND	Ground		
14	RIN2-	-LVDS differential data input (B2-B5, HS, VS, DE)	Negative	
15	RIN2+	+LVDS differential data input (B2-B5, HS, VS, DE)	Positive	
16	GND	Ground		
17	CLK-	-LVDS differential clock input	Negative	
18	CLK+	+LVDS differential clock input	Positive	
19	GND	Ground (Reserved for supplier)		
20	NC	No connection		
21	NC	No connection		
22	GND	Ground		
23	NC	No connection		
24	NC	No connection		
25	GND	Ground		
26	NC	No connection		
27	NC	No connection		
28	GND	Ground		
29	NC	No Connect		
30	NC	No Connect		

Samsung Secret

Approval


No.	Symbol	Function	Polarity	Remarks
31	VSSLED	Ground – LED		
32	VSSLED	Ground – LED		
33	VSSLED	Ground – LED		
34	NC	No Connect (Reserved for supplier)		
35	PWM	System PWM Signal Input (+3.3V Swing)		
36	BL_EN	Back Light enable pin (+3.3V Input)		
37	NC	No Connector		
38	VDDLED	7V – 20V LED power		
39	VDDLED	7V – 20V LED power		
40	VDDLED	7V – 20V LED power		

Samsung Secret

5. 2 LVDS Interface

5.2.1 LVDS DC Input


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
LVDS Differential Voltage	V _{id}	200	200	400	mV	
Input Common Mode Voltage	V _{CM}	0.4	1.2	1.6	V	

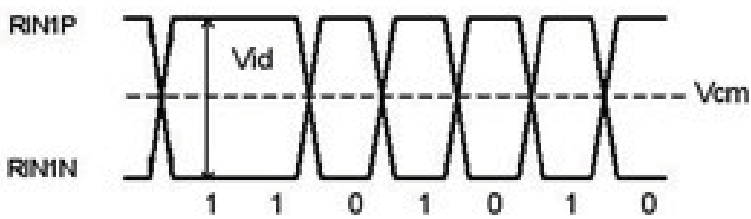

5.2.2 LVDS AC Input

ITEM		SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
LVDS input clock frequency		F _{CLK_LVDS}	20	-	100	MHz	
RIN skew margin	100 MHz	T _{RSRM}	-200	-	200	ps	(1),(2)
	50 MHz		-600	-	600	ps	(1),(2)
SSC Modulation Rate			-	-	±3	%	(3)
SSC Modulation Frequency			-	-	300	KHz	(3)


Note (1) : LVDS Receiver Skew (Strobe) Margin

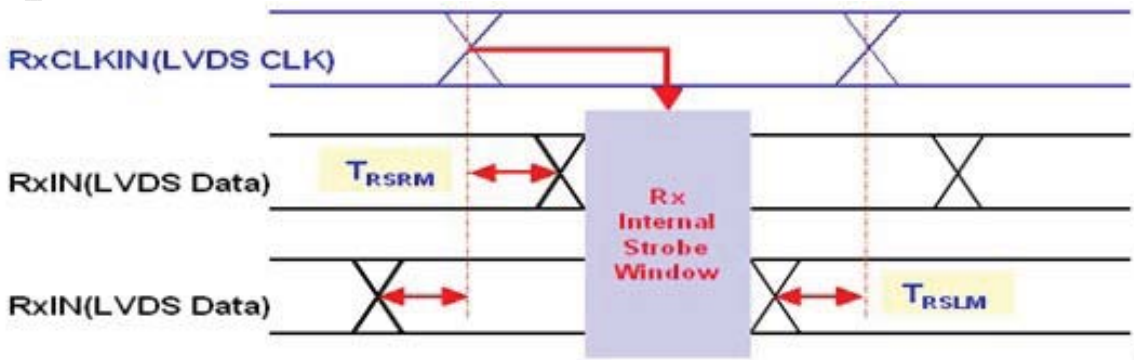


Samsung Secret

Approval

Note (2) : Ideal Strobe Positions for LVDS Input

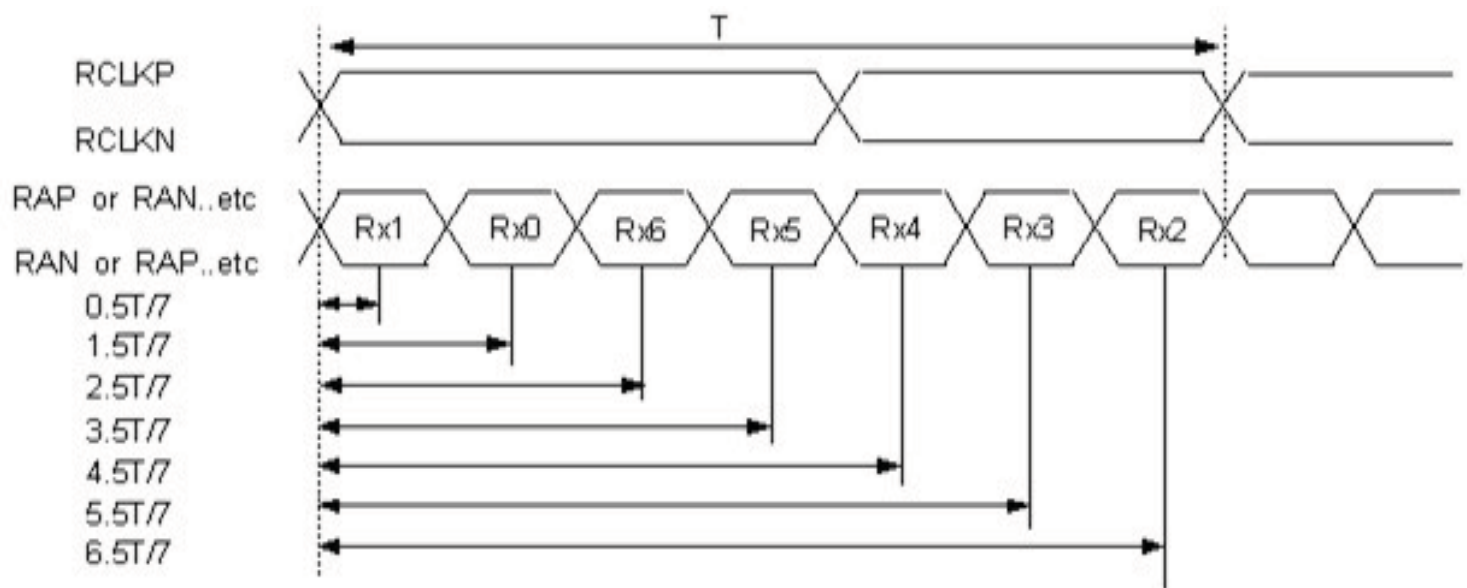

Note (3) : SSC (Spread Spectrum Clock)

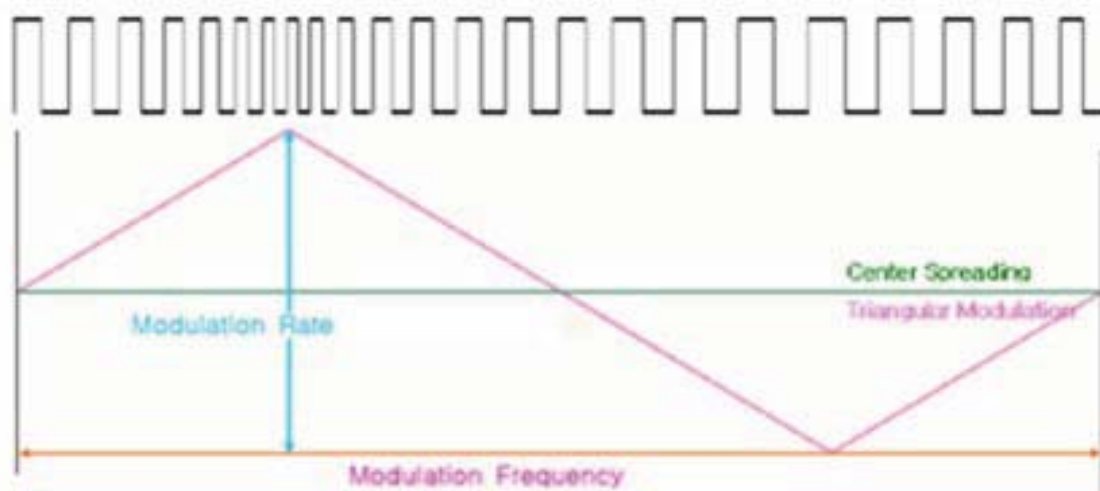
**Samsung Secret**

Approval

5.3 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-con

* 6Bit NS Format

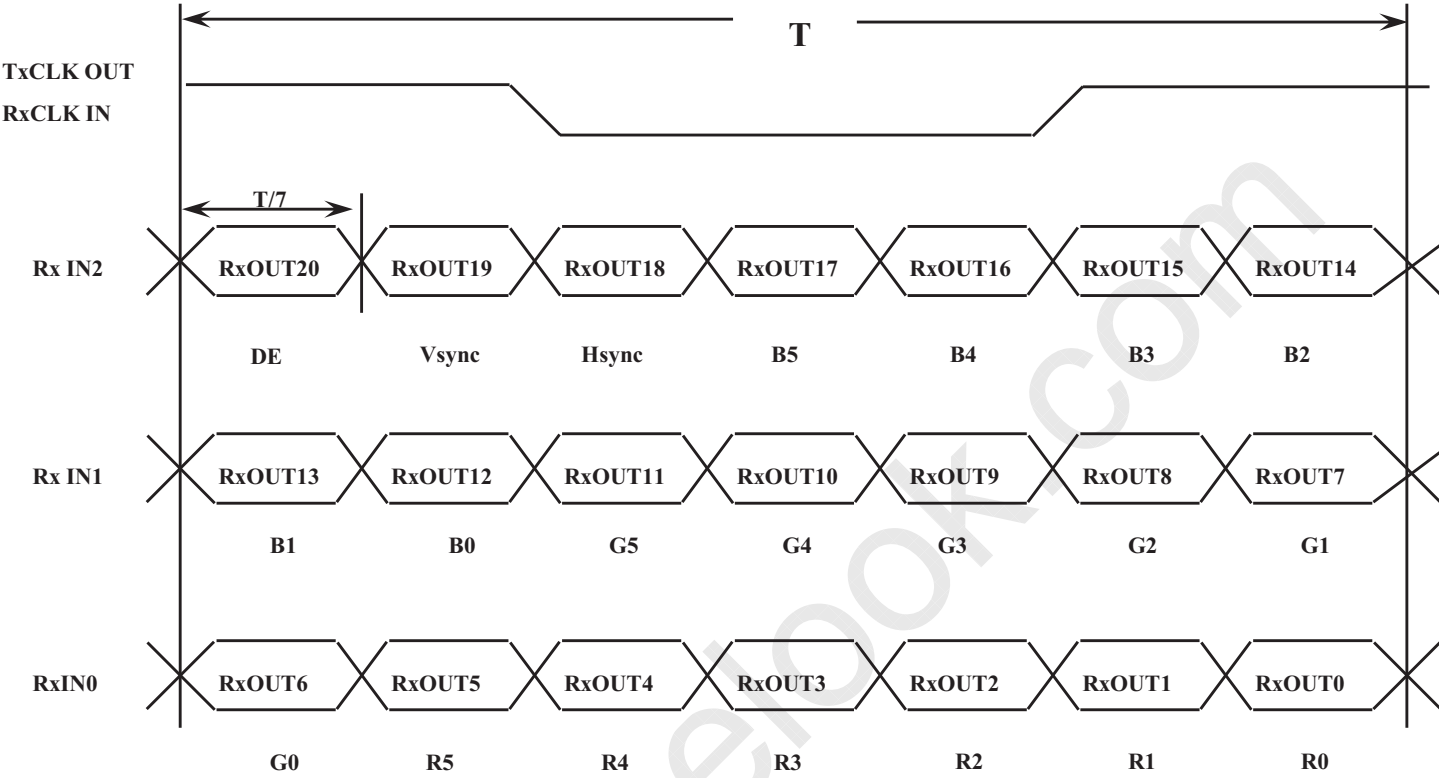

Samsung Secret



5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color & Gray scale	Data Signal																	
	R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Light blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Black ↑ ↓ Red	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	^ ⋮ v					^ ⋮ v					^ ⋮ v							
	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Black ↑ ↓ Green	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	^ ⋮ v					^ ⋮ v					^ ⋮ v							
	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Black ↑ ↓ Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	^ ⋮ v					^ ⋮ v					^ ⋮ v							
	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Note 1) Definition of gray :


Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

Samsung Secret

Approval

5.5 Pixel Format in the display

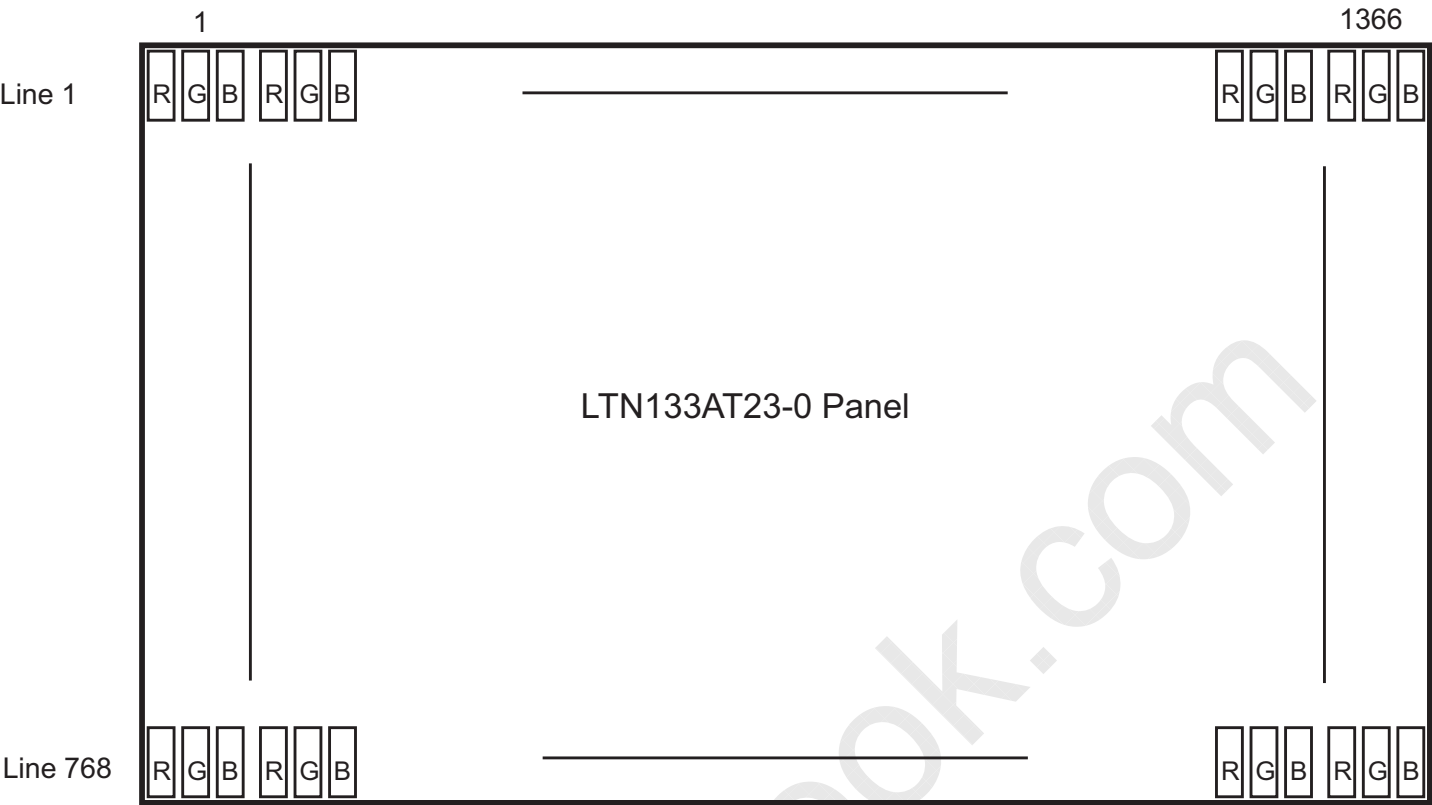

Samsung Secret


6. INTERFACE TIMING

Approval

6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	778	780	868	Lines	
Vertical Active Display Term	Display Period	TVD	-	768	-	Lines	
One Line Scanning Time	Cycle	TH	1466	1500	1766	Clocks	
Horizontal Active Display Term	Display Period	THD	-	1366	-	Clocks	


6.2 Timing diagrams of interface signal

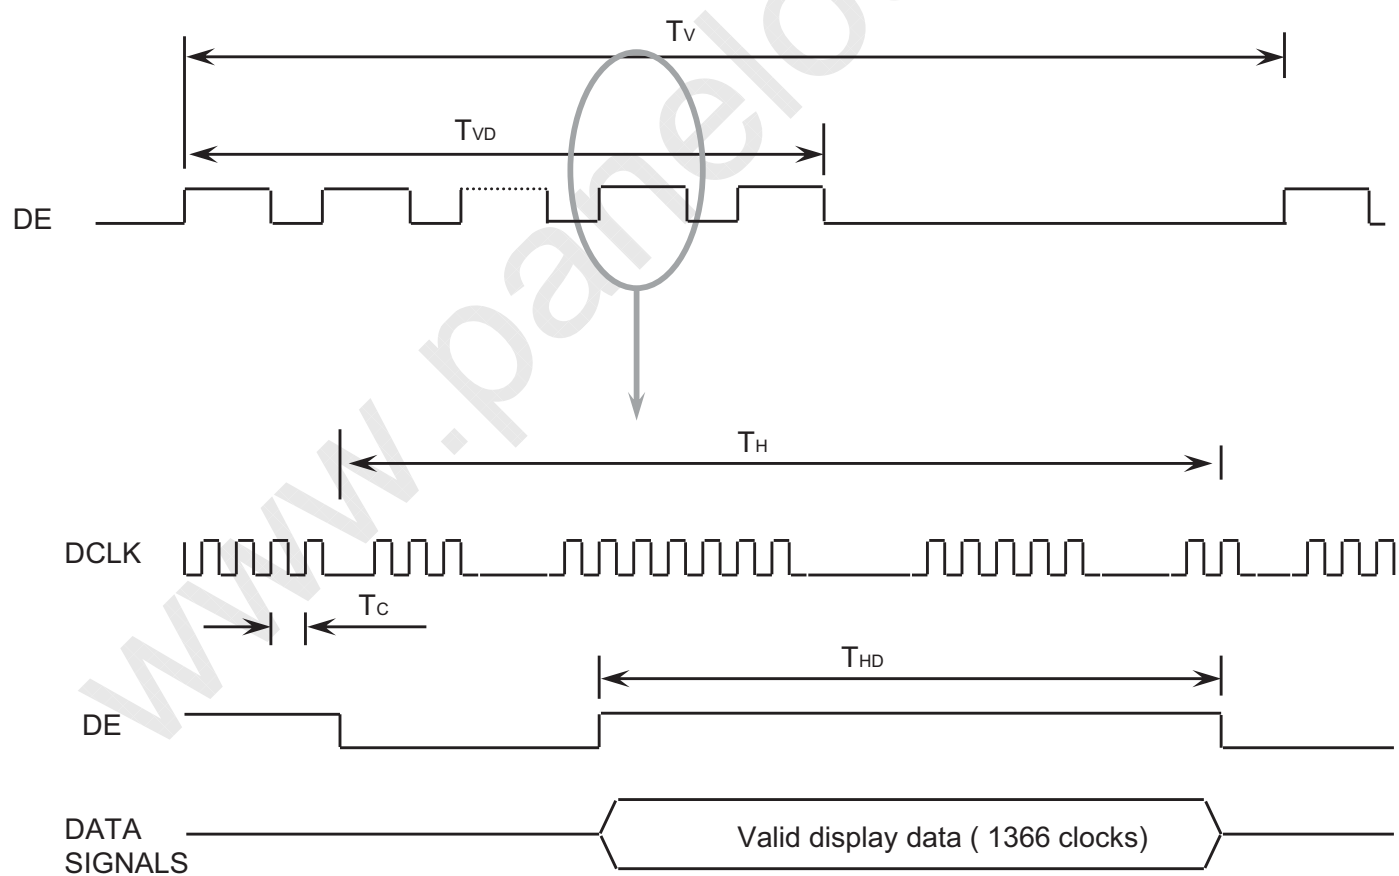

Samsung Secret

6.3 Power ON/OFF Sequence

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

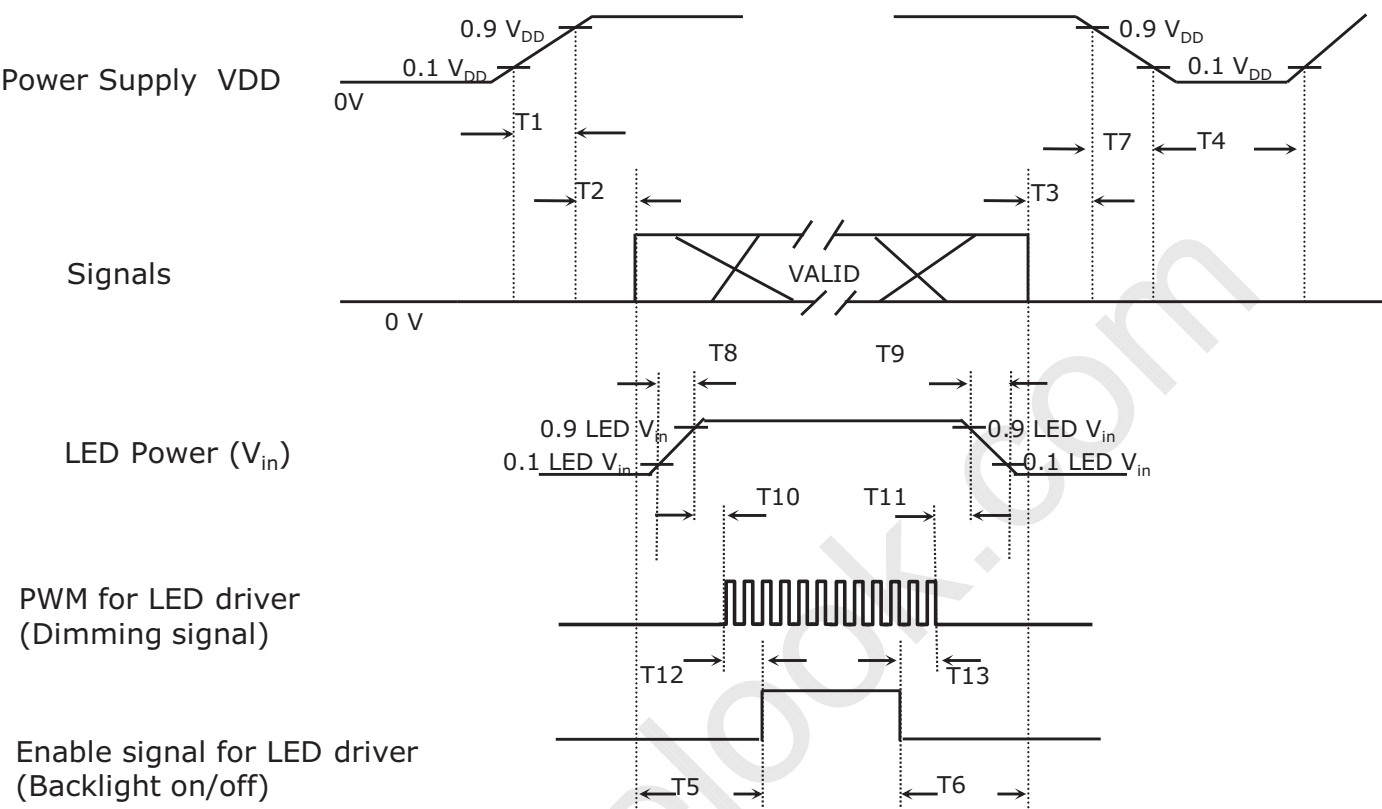

Power ON/OFF Sequence

Timing (ms)	Remarks
$0.5 < T1 \leq 10$	V _{DD} rising time from 10% to 90%
$0 < T2 \leq 50$	Delay from V _{DD} to valid data at power ON
$0 < T3 \leq 50$	Delay from valid data OFF to V _{DD} OFF at power Off
$500 \leq T4$	V _{DD} OFF time for Windows restart
$200 \leq T5$	Delay from valid data to B/L enable at power ON
$200 \leq T6$	Delay from valid data off to B/L disable at power Off
$0 < T7 \leq 10$	V _{DD} falling time from 90% to 10%
$0.5 < T8 \leq 10$	LED V _{in} rising time from 10% to 90%
$0.5 < T9 \leq 10$	LED V _{in} falling time from 90% to 10%
$0 \leq T10$	Delay from LED driver Vin rising time 90% to PWM ON
$0 \leq T11$	Delay from PWM Off to LED driver Vin falling time 10%, Must Keep rule
$0 \leq T12$	Delay from PWM ON to B/L Enable ON, Must Keep rule
$0 \leq T13$	Delay from B/L Enable Off to PWM Off

Power Sequence & Timing Parameters

Samsung Secret

7. Mechanical Outline Dimension

Approval

Refer to the next page

www.panelook.com

Samsung Secret



* NOTE

1. SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.
 - PART NO./MATER. : 1-PEV 2045-40CE-025 / 1-PEV
2. LED CONNECTOR FOR BACKLIGHT TO BE SPECIFIED AS BELOW
 - PART NO./MATER. : PPS03-03B-011U1U
3. CALIBRATION MEASURING FORCE : 7700P-200
4. WEIGHT : 330g MAX
5. In order to avoid IC damage, it is not allow that overlapping of cables or antennas, camera, WLAN, over these COP location

8. PACKING


Approval

1. CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrupad form as shock absorber

(2) Packing Method

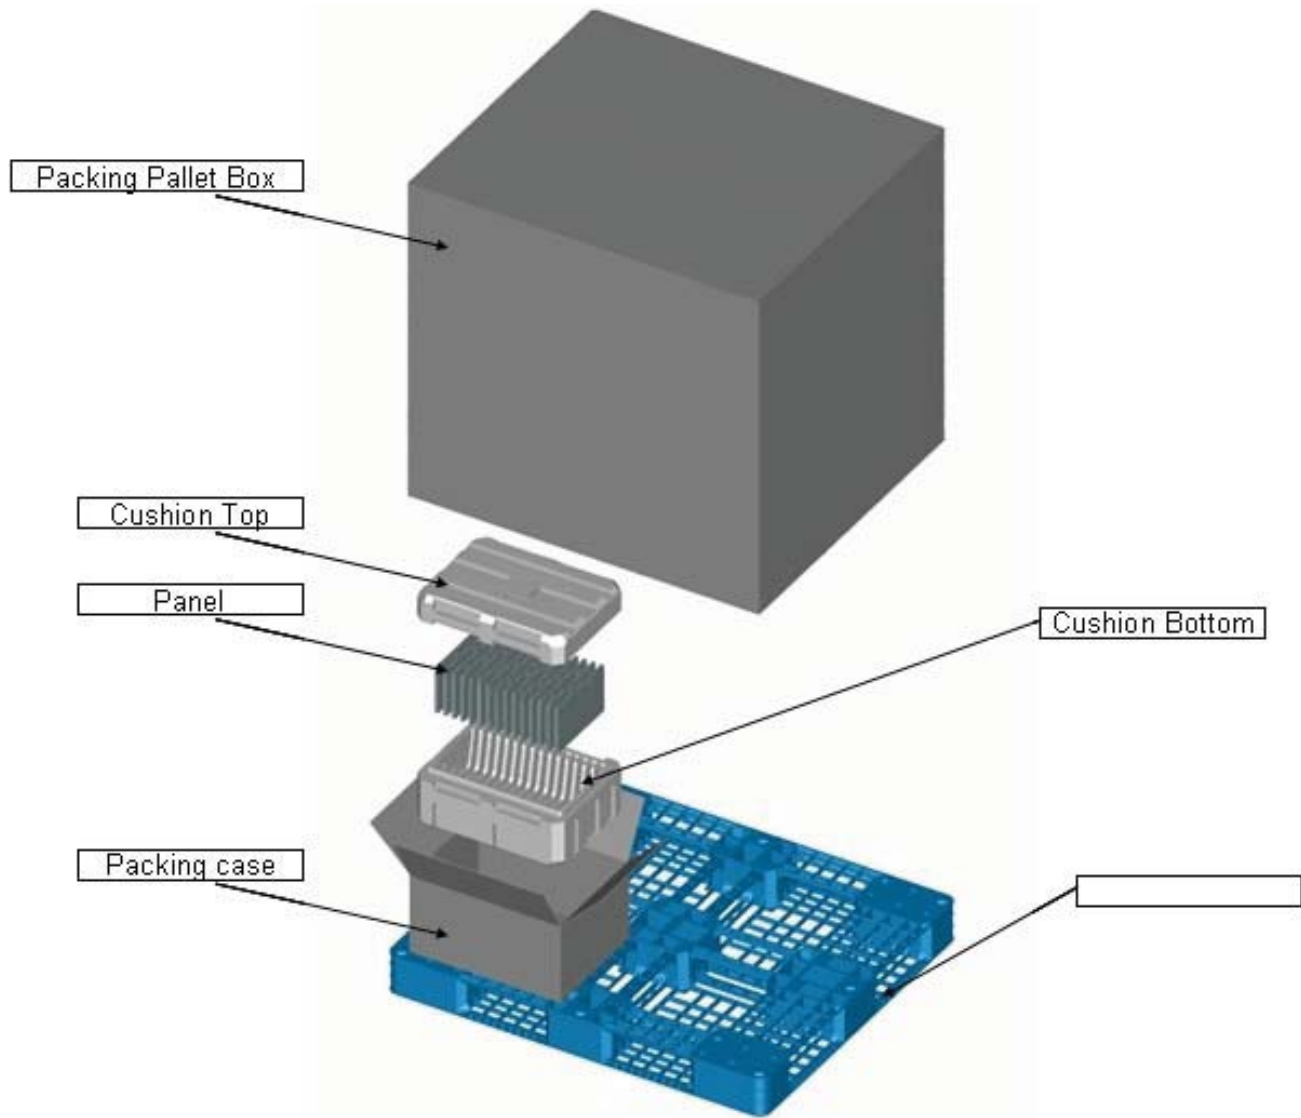

PACKING CASE

- Note 1) Total Weight : Approximately 7.0 kg
2) Acceptance number of piling : 30 sets
3) Carton size : 450(W) × 340(D) × 230(H)

Samsung Secret

Approval

(3)Packing Material

No	Part name	Quantity
1	Static electric protective sack	30
2	Cushion pad(Inner box) included shock absorber	1 set
3	Silicagel (500x1)	10g*1EA
4	Pictorial marking	2 pcs
5	Carton	1 set


9. MARKINGS & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1)Parts number : LTN133AT23-0

(2)Revision code : 3 letters

(3)Lot number : X X X X XXX XX X 0**

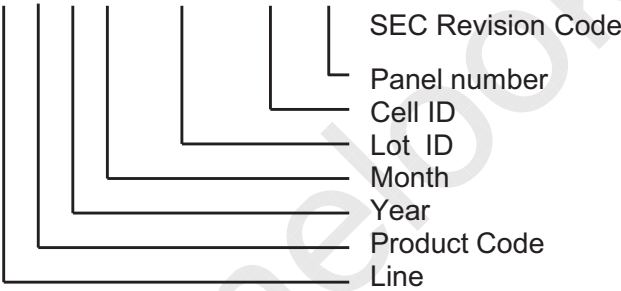

(4) Nameplate Indication

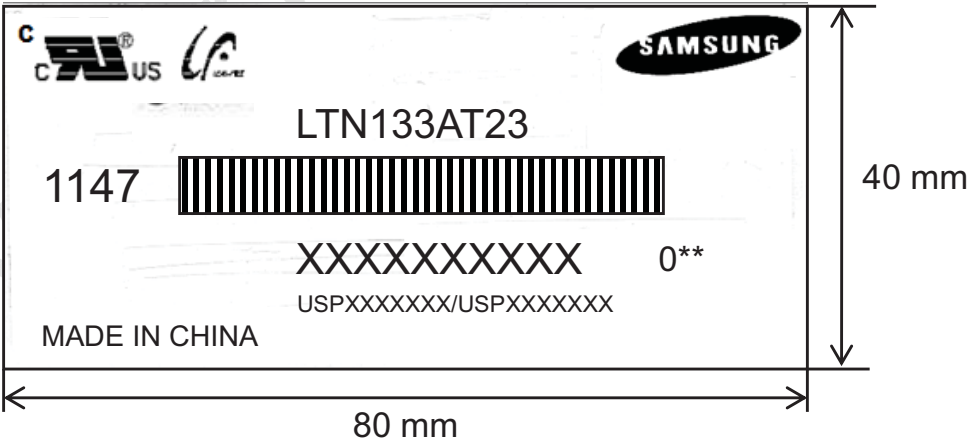

Parts name : LTN133AT23

Lot number : XXXXXXXXXX

USPXXXXXXX/USPXXXXXXX : USP Related information Num.


Inspected work week : 1147(2011 year, 47th week)

Product revision Code : 0**

Samsung Secret

Approval

(5) Packing small box attach

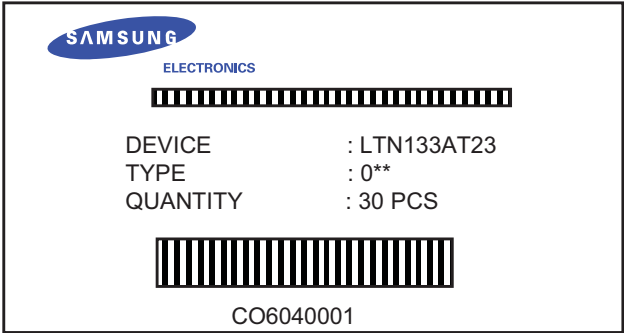

Samsung Secret



10. GENERAL PRECAUTIONS

Approval

1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and LED back-light.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA (Isoprophyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

Samsung Secret

2. STORAGE

Approval

ITEM	Unit	Min.	Max.
Storage Temperature	(℃)	5	40
Storage Humidity	(%rH)	35	75
Storage life	12 months		
Storage Condition	-The storage room should provide good ventilation and temperature control. - Products should not be placed on the floor, but on the Pallet away from a wall. - Prevent products from direct sunlight, moisture nor water; Be cautious of a build up of condensation. - Avoid other hazardous environment while storing goods. - If products delivered or kept in conditions of over the storage period of 3 months, the recommended temperature or humidity range. we recommend you leave the at a temperature of 20℃ and a humidity of 50% for 24 hours.		

3. OPERATION

- (a) Do not connect, disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3 “ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

Samsung Secret

Approval

4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time, it can be the situation when the image "sticks" to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

Samsung Secret